



T-Connector Plug & Socket


16A

Socket: 2x 1mm²/1.5mm² T&E solid core
Plug: 1x Flexible (Class 5/6 conductors)

- Lightning fast Quickwire™ push in technology
- Easy disconnection for maintenance and testing.
- Pre-flexed plug options available.
- Compact - Fits through 30mm hole.




	Socket	Plug
PART NUMBER	QTPS3	
RATING	250V~ 16A (Overcurrent protection limited to 16A)	
POLES	3 - pole	
CABLE ENTRY	2 x 1.0mm ² – 1.5mm ² Twin & Earth CPC Cable (6242Y or 6242B), Solid cores (Class 1)	1 x Flexible (Class 5/6 conductors) or 1 x Rigid (Class 1 conductors)
CONDUCTOR SIZE	1.0mm ² – 1.5mm ² Twin & Earth CPC Cable (6242Y or 6242B), Solid cores (Class 1)	0.5mm ² – 1.5mm ²
DIMENSIONS	23mm x 24mm x 60mm (fits through a 30mmØ hole)	
IP RATING	IP30	IP20 (When plugged in)




CABLE PREPARATION

Cut and strip the 1.0mm² / 1.5mm² solid core, flat twin and earth cable as shown below:

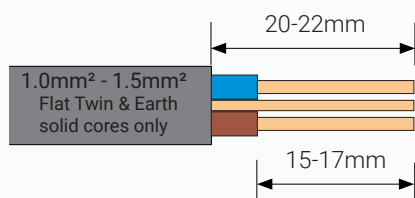


INSTALLATION


1. Align prepared cable and guide into outlet, until resistance is met. At this stage check sheath is within cord grip (A) and conductors are visible through windows (B).




2. Continue to push cable until shuttle snaps into place (A). Repeat process for other outlet or push in unused shuttle.



1. After cable termination, close just cover side which includes cord grip (A), then push cable firmly into cord grip (B).




Bring other cover side around to meet and press both halves together until they click (C). Check both latches have engaged.



CABLE REMOVAL

Mount removal tool (part no. QRT). Place thumb on thumb grip and using other hand, squeeze side arms so they locate beneath the snaps. Push forward.



Patent no. PCT/GB2016/053627
Reg.Design. 6004582

This product is designed for lighting installations only.
Overcurrent protection is limited to 16A max.
Circuit to be protected by 16A MCB max.

This product should be installed by a qualified electrician, ensuring the installation complies to the current IET wiring regulations. Switch off mains supply before commencing any electrical work.



+44 (0)1183 840025 | Info@quickwire.co.uk | www.quickwire.co.uk

Quickwire Limited, Ruscombe Business Park, Ruscombe Lane, Twyford, Berkshire RG10 9JW, UK

A flexconnectors Company